

ASSISTANT COMMISSIONER FOR PATENTS
Washington, D.C. 20231

21.02

October 1, 1999

Express Mail Label No. EL414495571US

Dear Sir:

Transmitted herewith for filing is the patent application of

Inventor(s): Armin Harold Christofferson, Leon Edward Gregg, James Lawrence Tilbury, and James Michael Van Oosbree

For: **METHOD, SYSTEM, AND PROGRAM FOR ACCESSING FILES IN A FILE SYSTEM**

Enclosed are:

- ☒ 17 pages of Application for Patent Including 10 Pages Specification; 1 Page Abstract; and 27 Claims
- ☒ 2 No. of Sheets of Drawings Sheet(s) of drawings (☒ informal)
- ☒ An assignment of the invention to International Business Machines Corporation. (☐ Will follow.)
- ☐ An associate power of attorney.
- ☐ A verified statement to establish small entity status under 37 CFR 1.9 and 1.27.
- ☒ Declaration and Power of Attorney. (☐ Will follow.)
- ☐ Certified copy of Patent Application No. filed from which priority is claimed under 35 U.S.C. §119.
- ☐ IDS enclosed. ☐ with references.

CALCULATION OF FEES

ITEM	NO. OF CLAIMS FILED MINUS BASE*	NO. OF CLAIMS OVER BASE	X SM/LG ENTITY FEE	\$ AMOUNT	\$ FEE
A TOTAL CLAIMS FEE	27 - 20* =	7	X \$9 or X \$18	\$126	
B INDEPENDENT CLAIMS FEE**	3 - 3* =	0	X \$39 or X 78	\$0	
C SUBTOTAL - ADDITIONAL CLAIMS FEE (ADD FINAL COLUMN IN LINES A + B)					\$126
D MULTIPLE-DEPENDENT CLAIMS FEE			SMALL ENTITY FEE = \$130 LARGE ENTITY FEE = \$260		\$0
E BASIC FEE*			SMALL ENTITY FEE = \$380 LARGE ENTITY FEE = \$760		\$760
F TOTAL FILING FEE (ADD TOTALS FOR LINES C, D, AND E)					\$886
G ASSIGNMENT RECORDING FEE				\$ 40	\$40
**LIST INDEPENDENT CLAIMS 1, 10, 19					

Please charge my Deposit Account No. 50-0585 in the amount of \$

**A copy of this sheet is
enclosed.**

- ☒ A check in the amount of \$ 886 to cover the filing fee is enclosed.
- ☒ Check for \$ 40 covering the Recordation of Assignment fee enclosed.
- ☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 50-0585. **A copy of this sheet is enclosed.**
- ☒ Any additional filing fees required under 37 CFR 1.16.
- ☒ Any patent application processing fees under 37 CFR 1.17.
- ☐ The Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to Deposit Account No. 50-0585. **A copy of this sheet is enclosed.**
- ☐ Any patent application processing fees under 37 CFR 1.17.
- ☐ The issue fee set in 37 CFR 1.18 at or before mailing of the Notice of Allowance, pursuant to 37 CFR 1.311(b).
- ☐ Any filing fees under 37 CFR 1.16 for presentation of extra claims.

Respectfully submitted,

David W. Victor
Registration No. 39,867

Direct All Correspondence to:
David W. Victor
KONRAD, RAYNES & VICTOR, LLP
1180 S. Beverly Drive; Suite 501
Los Angeles, CA 90035

Direct Telephone Calls to:
(310) 556-7983

METHOD, SYSTEM, AND PROGRAM FOR
ACCESSING FILES IN A FILE SYSTEM

BACKGROUND OF THE INVENTION

5 1. Field of the Invention

The present invention relates to a method, system, and program for accessing a file in a file system by processing a data structure indicating the presence of preexisting files having the same name as a file to access.

10 2. Description of the Related Art

In data storage systems, before a file is stored, the file system is searched to determine if there is already a file having the name of the file to store. The file system includes the logical structures and software routines used to control access to files stored on a non-volatile storage medium, such as a hard disk drive, tape, optical disk,
15 etc. In a file system, the files are stored in directories which provide a hierarchical arrangement of data. Each file or directory on the media can be uniquely identified using two pieces of information: its filename and the path in the directory that is traversed to access the file. There are various file systems in use (FAT, Unix, and ISO9660 and UDF for CDROMs and DVD devices).

20 Each file representation exists in a directory structure specific to its file system. To add a file to the file system, the directory must be searched to determine if the file already exists on the media. These directory access operations can have a significant impact on performance because storage media such as hard disk drives, tape, and optical disks are relatively slow devices due to the need to mechanically
25 move the read head to different locations in the storage medium. In fact, such disk read operations can consume significant time.

One current solution to this problem is to maintain a list or database table of all file names in the file system. In this way, when a file write request is received, the

0340964100199
66T00T"ET960460

list can be checked to determine if the file to store or update is already in the file system. Such an approach avoids the burdensome operation of expending time doing I/O operations to search the file system. One problem with this approach is that the data structure to store the file names can be particularly large, especially with file systems that support long file names, e.g., 256 characters long, and increasing. As the storage capacity increases and the file name length increases, the usefulness of this technique decreases because the table needed to store the name of each file may increase to a point where it is no longer feasible to maintain in cache. In such case, the table would have to be stored on the non-volatile storage medium, and have to be accessed using the slower performing disk drive actuator and head.

Thus, there is a need in the art for an improved, method, system, and program for determining the current files in the file system.

SUMMARY OF THE PREFERRED EMBODIMENTS

If the majority of file access operations update existing files, then the directory search cannot be avoided. However, in an application where the primary file access is to add new files (data archive), the search is primarily to validate that the file does not already exist. Data archival also tends to produce new files at a very high rate. This causes archival systems to suffer major performance degradation as the number of files in the directory increases.

To overcome the limitations in the prior art described above, preferred embodiments disclose a method, system, and program for processing an input file in a file system, wherein the input file has an input file name. A function is applied to map the input file name to a value. A data structure is processed to determine whether there is a preexisting file in the file system having a name that maps, according to the function, to the same value to which the input file name maps. Two files that map to a same value according to the function are capable of having a same name.

In further embodiments, the function is a hash function that maps the input file name to an integer value. In such case, the data structure includes an entry for each possible integer value capable of being generated from the hash function.

In yet further embodiments, the data structure is processed to determine
5 whether there is a preexisting file by determining whether the entry for the integer value to which the input file name maps indicates the presence of one preexisting file mapping to the same integer value as the input file name.

In still further embodiments, the data structure is a one-dimensional array. Each entry is capable of having one of two values and the entry is set to a first value if
10 there is one preexisting file name in the file system that maps to the integer value for the entry. In such case, determining whether there is one preexisting file comprises determining whether the input file name maps to one entry that has the first value.

Preferred embodiments provide a method, system, and program for determining from a data structure a possible presence of a preexisting file in the file
15 system having the same name as an input file. Preferred embodiments utilize a function, such as a hash function, to map file names to values that can be represented using substantially less space than the file name. The data structure maintains information on values to which preexisting files map. In this way, upon receiving a write operation or other file request, a determination can be made from processing the
20 data structure, such as the hash table in cache, as to whether there is a preexisting file that maps to the same value as the input file. This may indicate that the preexisting file has the same name as the input file.

After determining that the input file maps to a value to which one preexisting file maps, the file system can be scanned to determine if there is a file with the same
25 name as the input file. If not, then a file can be added for the input file. Otherwise, if there is already a file with the same name, then writing the input file would comprise updating the preexisting file with the same name with the content of the writes.

Preferred embodiments provide a system to process file operations, such as a write

0340961 100199
65 FOOTER

operations, by first checking the table which would definitely indicate if there was no file having the same name. This allows the operating system to avoid, in most cases, having to search the entire file system each time data is written to the file system.

5

BRIEF DESCRIPTION OF THE DRAWINGS

Referring now to the drawings in which like reference numbers represent corresponding parts throughout:

FIG. 1 is a block diagram illustrating a computing environment in which preferred embodiments of the present invention are implemented; and

10 FIG. 2 illustrates logic to process a write request in accordance with preferred embodiments of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

In the following description, reference is made to the accompanying drawings
15 which form a part hereof and which illustrate several embodiments of the present invention. It is understood that other embodiments may be utilized and structural and operational changes may be made without departing from the scope of the present invention.

20

Problems with Current Archival Storage Systems

Current archival storage systems back-up files in a mass storage device, such as magnetic tape cassettes, optical disks, etc. It has been found that most of the write operations to files in an archival storage system comprise writing new files as opposed to updating existing files. Files are often written once to archival storage and
25 never subsequently accessed to read or update. However, for each new write operation, the operating system must scan the entire file system to determine whether the file that is the subject of the write operation is a new file or existing file. If the file being written already exists, then the operating system updates the existing file

094099-1003
"ET 960460"

with the write data. Otherwise, if the file to write does not currently exist in the file system, then the operating system creates a new file in the file system to archive the write data.

Although it is likely in archival storage systems that a write operation is going to create a new file, the operating system nonetheless performs the time consuming operation of scanning the entire file system, which may require reading directory information from fragmented storage locations. The operating system must determine whether a same named file exists in the system to avoid a situation where there are two files with the exact same name. The time needed to scan increasingly large file systems can significantly affect the performance of write operations. For this reason, there is a need in the art for an improved system for determining whether a file already exists in the file system. Such an improved system would be particularly useful for archival storage systems where most write operations are to new files and, thus, do not require a search of the file system for a matching file name.

Computing Environment

FIG. 1 illustrates a computing environment in which preferred embodiments are implemented. Computer system 2 may comprise any computing system known in the art, e.g., workstation, personal computer, mainframe, palmtop, laptop, server, etc.

The computer system 2 includes an operating system 4, such as MICROSOFT WINDOWS, AIX, OS/390, OS/2, MVS, UNIX, LINUX** etc. The computer system 2 further includes a file system 6. The computer system 2 is capable of accessing a storage device 8, which may comprise any type of non-volatile storage device known in the art, e.g., hard disk drive, tape drive, optical disk system, holographic storage units, etc. The file system 6 would define the location of parts of files maintained in the storage device. The file system 6 would provide a mapping of logical file names to physical locations in the storage device 8. The storage device 8 may comprise a single storage device or a multitude of storage devices at distributed locations in a

network. In such distributed storage environments, the file system 6 would define the location of files in distributed storage throughout a network.

5 A file system is a logical method for organizing and storing information. The file is the smallest unit in which information is stored. A hierarchical arrangement of directories with respect to a root directory, which is the root node of the hierarchical file structure, defines the logical address of files in the system. For instance, in UNIX file systems, the root directory is represented by the forward slash character "/". Every file and directory in the file system may be identified by a complete list of the names of the directories to that file or directory, which is referred to as the pathname
10 of the file. The pathname includes all directories under which the file is located followed by the file name.

Many file systems include logical and physical components. The logical file system is the level of the file system at which users can request file operations by system calls that carry out file system requests. The logical file system provides local
15 name resolution for system calls. Local name resolution allows the logical file system to access multiple file system implementations, such as multiple physical file systems, through a uniform name space. The physical file system component manages permanent storage of data on the storage device 8. A file request would first be handled by the logical file system, which would then build a request to access the data
20 to pass to the physical file system. The physical file system then proceeds to access the requested data directly from the storage device 8 using the address information of physical data on the storage device 8 to directly address the data on the storage device 8.

In preferred embodiments, the operating system 4 uses a hash function 10 to
25 map the logical file names, e.g., c:\work\patents\file.dat, in the file system 6 to an integer hash value in a manner known in the art. In preferred embodiments, the hash function 10 is designed as a wide hash to produce a large number of possible hash values, e.g., 32,000 to 64,000 different hash values. Such a design would reduce the

00409613 100199
66T00T ET 960460

likelihood that two different file names would have the same hash value. The operating system 4 at some point would scan each file name in the file system 6, subject each file name to the hash function 10, and produce a hash value for each file name.

- 5 The operating system 4 further maintains a hash table 12 in cache memory. This hash table 12 may comprise a one dimensional table that includes a one bit entry for each possible hash value, wherein the descending entries correspond to ever increasing hash values. When scanning the file system 6 during initialization, the operating system 6 would apply the hash function 10 to each file name and then set
- 10 the bit in the hash table 12 to "on" at the entry or row number corresponding to the integer hash value determined from the hash function 10. For instance, if a file name was hashed to "4", then the operating system 4 would turn the fourth entry in the hash table 12 to "on," indicating that there is a file name having a hash value of 4 in the storage device 8.
- 15 FIG. 2 illustrates logic implemented in the operating system 4 to process requests to write data to a file in accordance with the preferred embodiments. Control begins at block 100 with the operating system 4 receiving a request to write a subject file. The operating system 4 applies (at block 102) the hash function 10 to the file name of the received file. If the entry in the hash table 12 corresponding to the
- 20 determined hash value is "on" (at block 104), then this indicates that there is another file in the file system 6 that maps to the same hash value as the received file. As discussed, in wide hashes, it is unlikely that two files having different names will map to the same value. Thus, in most cases, indication that there is a preexisting file in the file system 6 mapping to the same hash value likely indicates that this preexisting file
- 25 has the same name as the received file.

If there is not a file with the same name, i.e., the entry value is "off," then the operating system 4 sets (at block 106) the entry in the hash table 12 corresponding to

0040994.1039
667007"ET960460

the produced hash value to "on" and adds (at block 108) the received file to the file system as a new file.

If the entry in the hash table 12 for the produced hash value was "on," then the operating system 4 searches (at block 110) the file system 6 for any files having the same name as the received file. If, at block 112, it is determined that there is not a file in the file system 6 having the same name, then the operating system 4 adds (at block 108) the received file to the file system as a new file. Otherwise, if there is a file with the same name as the received file, then the operating system 4 returns an error rejecting the new file (at block 114) as the file already exists in the system. Blocks 112 and 114 occur if the write request is to write a new file to the system. In such case, if a file already exists with the same name, then the request is rejected at block 114. However, if the request is to update an existing file, as opposed to writing a new file, then the operating system 4 would overwrite a preexisting file with the same name or return an error rejecting the update request if there was no preexisting file with the same name in the file system 6 to update.

In further embodiments, the hash table 12 may comprise multiple columns, including entries for different directories in the file system 6. In this way, the hash table 12 can be used to obtain file information for multiple directories. Alternatively, whenever a new directory/folder is referenced, the hash function 10 is applied and the table is updated with the entries for the current directory of interest.

Preferred embodiments substantially reduce the time needed to write a file, especially in archival storage systems where most write operations are for new files, and not for preexisting files. Further, with preferred embodiments, time savings are even more apparent for very large file systems that are very fragmented, and would require even more time to search the file system. Moreover, the implementation of the preferred embodiment hash function 10 and table 12 utilizes minimal processor and cache resources, as opposed to current systems that use substantial processor

09409643 100199
65700T "ET90460

resources to scan an entire fragmented file system or systems that require substantial tables to store a list of every file in the file system.

Conclusions And Alternative Embodiments

5 This concludes the description of the preferred embodiments of the invention. The following describes some alternative embodiments for accomplishing the present invention.

 The preferred embodiments may be implemented as a method, apparatus or article of manufacture using standard programming and/or engineering techniques to
10 produce software, firmware, hardware, or any combination thereof. The term "article of manufacture" (or alternatively, "computer program product") as used herein is intended to encompass one or more computer programs and data files accessible from one or more computer-readable devices, carriers, or media, such as a magnetic storage media, "floppy disk," CD-ROM, a file server providing access to the programs via a
15 network transmission line, holographic unit, etc. Of course, those skilled in the art will recognize many modifications that may be made to this configuration without departing from the scope of the present invention.

 Preferred embodiments were described with respect to accessing the hash table when receiving a write request. However, the hash table could be accessed
20 when receiving a read request to determine whether the requested file to read is in the file system.

 In further embodiments, the preferred embodiment hash table could be used whenever a program or system needs to determine the presence of a file in the file system or operate on the file.

25 Preferred embodiments were implemented using a hash function to convert a file name comprised of a character string to an integer value. In alternative embodiments, functions other than hash functions may be used to convert a lengthy

0040961 " 400469
55 T00T " 8 T 950460

character string to a single integer values. Alternatively, the function may convert the file name to a value other than an integer value.

The hash table was defined as a single column array, wherein the location of the entry in the array indicates the corresponding hash value of the entry. In
5 alternative embodiments, the table may comprise multiple columns, one indicating the value to which the file name was converted and another indicating the presence of the file.

In summary, preferred embodiments disclose a system, method, and program for processing an input file in a file system, wherein the input file has an input file
10 name. A function is applied to map the input file name to a value. A data structure is processed to determine whether there is a preexisting file in the file system having a name that maps, according to the function, to the same value to which the input file name maps. Two files that map to a same value according to the function are capable of having a same name.

15 The foregoing description of the preferred embodiments of the invention has been presented for the purposes of illustration and description. It is not intended to be exhaustive or to limit the invention to the precise form disclosed. Many modifications and variations are possible in light of the above teaching. It is intended that the scope of the invention be limited not by this detailed description, but rather by
20 the claims appended hereto. The above specification, examples and data provide a complete description of the manufacture and use of the composition of the invention. Since many embodiments of the invention can be made without departing from the spirit and scope of the invention, the invention resides in the claims hereinafter appended.

25

30 **Microsoft, Windows, and Windows NT are registered trademarks of Microsoft Corporation; AIX, OS/390, and OS/2 are registered trademarks and MVS is a trademark of IBM; Unix is a registered trademark of The Open Group; and LINUX is a trademark of Linus Torvalds.

09409613 100199

WHAT IS CLAIMED IS:

- 1 1. A method for processing an input file in a file system, wherein the
2 input file has an input file name, comprising:
3 applying a function to map the input file name to a value; and
4 processing a data structure to determine whether there is a preexisting file in
5 the file system having a name that maps, according to the function, to the same value
6 to which the input file name maps, wherein two files that map to a same value
7 according to the function are capable of having a same name.

- 1 2. The method of claim 1, wherein the mapped-to values require fewer
2 bits of storage than the file names.

- 1 3. The method of claim 1, wherein the function is a hash function that
2 maps the input file name to an integer value, and wherein the data structure includes
3 an entry for each possible integer value capable of being generated from the hash
4 function.

- 1 4. The method of claim 3, wherein processing the data structure to
2 determine whether there is a preexisting file comprises determining whether the entry
3 for the integer value to which the input file name maps indicates the presence of one
4 preexisting file mapping to the same integer value as the input file name.

- 1 5. The method of claim 4, wherein the data structure is a one-dimensional
2 array and wherein each entry is capable of having one of two values, further
3 comprising setting the entry to a first value if there is one preexisting file name in the
4 file system that maps to the integer value for the entry, and wherein determining
5 whether there is one preexisting file comprises determining whether the entry for the
6 integer value to which the input file name maps has the first value.

0940963 " 1004 99
657007" 87960460

1 6. The method of claim 1, further comprising:
2 applying the function to each file name in the file system to map each file
3 name to one value; and
4 indicating in the data structure, for each file name, that there is one preexisting
5 file for the value to which the file name maps.

1 7. The method of claim 6, wherein the input file is the subject of an
2 access request, further comprising scanning each file in the file system to determine if
3 there is at least one preexisting file having the same name as the input file name if
4 there is one preexisting file in the file system having a name that maps, according to
5 the function, to the same value to which the input file name maps.

1 8. The method of claim 7, wherein the access request to the input file is
2 to add the input file as a new file to the file system, further comprising:
3 adding the input file as a new file to the file system if no preexisting file in the
4 file system has the same name as the input file name; and
5 rejecting the access request if there is a preexisting file in the file system
6 having the same name.

1 9. The method of claim 7, wherein the access request to the input file is
2 to update a file in the file system with data from the input file, further comprising:
3 updating a preexisting file in the file system having the same name as the
4 input file with the data in the input file if there is such a preexisting file; and
5 rejecting the access request if there is no preexisting file in the file system
6 having the same name as the input file name.

0940961-100499
55T00T E 960460

1 10. A system for processing an input file in a file system, wherein the
2 input file has an input file name, comprising:
3 means for applying a function to map the input file name to a value; and
4 means for processing a data structure to determine whether there is a
5 preexisting file in the file system having a name that maps, according to the function,
6 to the same value to which the input file name maps, wherein two files that map to a
7 same value according to the function are capable of having a same name.

1 11. The system of claim 10, wherein the mapped-to values require fewer
2 bits of storage than the file names.

1 12. The system of claim 10, wherein the function is a hash function that
2 maps the input file name to an integer value, and wherein the data structure includes
3 an entry for each possible integer value capable of being generated from the hash
4 function.

1 13. The system of claim 10, wherein the means for processing the data
2 structure to determine whether there is a preexisting file comprises determining
3 whether the entry for the integer value to which the input file name maps indicates the
4 presence of one preexisting file mapping to the same integer value as the input file
5 name.

1 14. The system of claim 13, wherein the data structure is a one-
2 dimensional array and wherein each entry is capable of having one of two values,
3 further comprising setting the entry to a first value if there is one preexisting file name
4 in the file system that maps to the integer value for the entry, and wherein determining
5 whether there is one preexisting file comprises determining whether the entry for the
6 integer value to which the input file name maps has the first value.

04093.1049
654007 ET 960460

1 15. The system of claim 10, further comprising:
2 means for applying the function to each file name in the file system to map
3 each file name to one value; and
4 means for indicating in the data structure, for each file name, that there is one
5 preexisting file for the value to which the file name maps.

1 16. The system of claim 10, wherein the input file is the subject of an
2 access request, further comprising means for scanning each file in the file system to
3 determine if there is at least one preexisting file having the same name as the input
4 file name if there is one preexisting file in the file system having a name that maps,
5 according to the function, to the same value to which the input file name maps.

1 17. The system of claim 16, wherein the access request to the input file is
2 to add the input file as a new file to the file system, further comprising:
3 means for adding the input file as a new file to the file system if no preexisting
4 file in the file system has the same name as the input file name; and
5 means for rejecting the access request if there is a preexisting file in the file
6 system having the same name.

1 18. The system of claim 16, wherein the access request to the input file is
2 to update a file in the file system with data from the input file, further comprising:
3 means for updating a preexisting file in the file system having the same name
4 as the input file with the data in the input file if there is such a preexisting file; and
5 means for rejecting the access request if there is no preexisting file in the file
6 system having the same name as the input file name.

1 19. An article of manufacture for processing an input file in a file system,
2 wherein the input file has an input file name, the article of manufacture comprising

651001" E960460

3 computer usable media including at least one computer program embedded therein
4 that causes the computer to perform:
5 applying a function to map the input file name to a value; and
6 processing a data structure to determine whether there is a preexisting file in
7 the file system having a name that maps, according to the function, to the same value
8 to which the input file name maps, wherein two files that map to a same value
9 according to the function are capable of having a same name.

1 20. The article of manufacture of claim 19, wherein the mapped-to values
2 require fewer bits of storage than the file names.

1 21. The article of manufacture of claim 19, wherein the function is a hash
2 function that maps the input file name to an integer value, and wherein the data
3 structure includes an entry for each possible integer value capable of being generated
4 from the hash function.

1 22. The article of manufacture of claim 21, wherein processing the data
2 structure to determine whether there is a preexisting file comprises determining
3 whether the entry for the integer value to which the input file name maps indicates the
4 presence of one preexisting file mapping to the same integer value as the input file
5 name.

1 23. The article of manufacture of claim 22, wherein the data structure is a
2 one-dimensional array and wherein each entry is capable of having one of two values,
3 further comprising setting the entry to a first value if there is one preexisting file name
4 in the file system that maps to the integer value for the entry, and wherein determining
5 whether there is one preexisting file comprises determining whether the entry for the
6 integer value to which the input file name maps has the first value.

034064.0049
66T00T"ET960460

1 24. The article of manufacture of claim 19, further comprising:
2 applying the function to each file name in the file system to map each file
3 name to one value; and
4 indicating in the data structure, for each file name, that there is one preexisting
5 file for the value to which the file name maps.

1 25. The article of manufacture of claim 24, wherein the input file is the
2 subject of an access request, further comprising scanning each file in the file system
3 to determine if there is at least one preexisting file having the same name as the input
4 file name if there is one preexisting file in the file system having a name that maps,
5 according to the function, to the same value to which the input file name maps.

1 26. The article of manufacture of claim 25, wherein the access request to
2 the input file is to add the input file as a new file to the file system, further
3 comprising:
4 adding the input file as a new file to the file system if no preexisting file in the
5 file system has the same name as the input file name; and
6 rejecting the access request if there is a preexisting file in the file system
7 having the same name.

1 27. The article of manufacture of claim 25, wherein the access request to
2 the input file is to update a file in the file system with data from the input file, further
3 comprising:
4 updating a preexisting file in the file system having the same name as the
5 input file with the data in the input file if there is such a preexisting file; and
6 rejecting the access request if there is no preexisting file in the file system
7 having the same name as the input file name.

651007"ET950460


METHOD, SYSTEM, AND PROGRAM FOR
ACCESSING FILES IN A FILE SYSTEM

ABSTRACT

Disclosed is a system, method, and program for processing an input file in a
5 file system, wherein the input file has an input file name. A function is applied to
map the input file name to a value. A data structure is processed to determine
whether there is a preexisting file in the file system having a name that maps,
according to the function, to the same value to which the input file name maps. Two
files that map to a same value according to the function are capable of having a same
10 name.


09409613 100199
56T00T 8T960450

FIG. 1

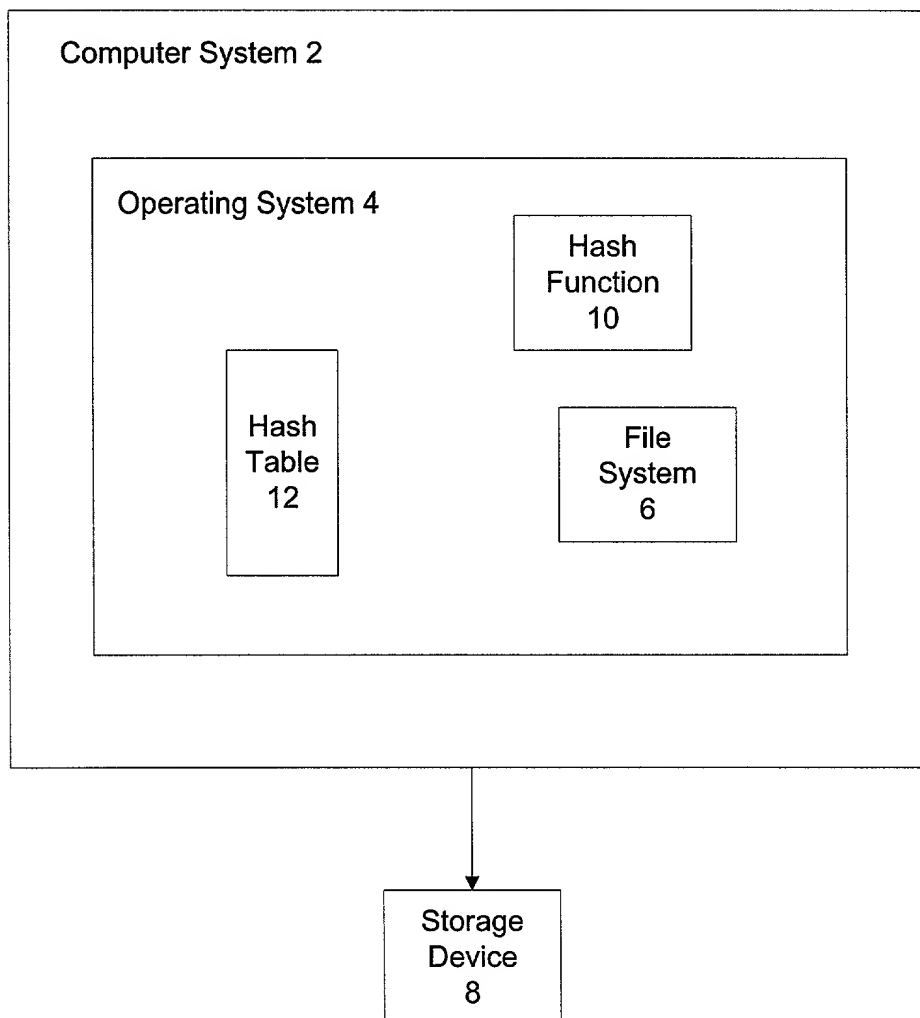

55T00T"ET960450

FIG. 2

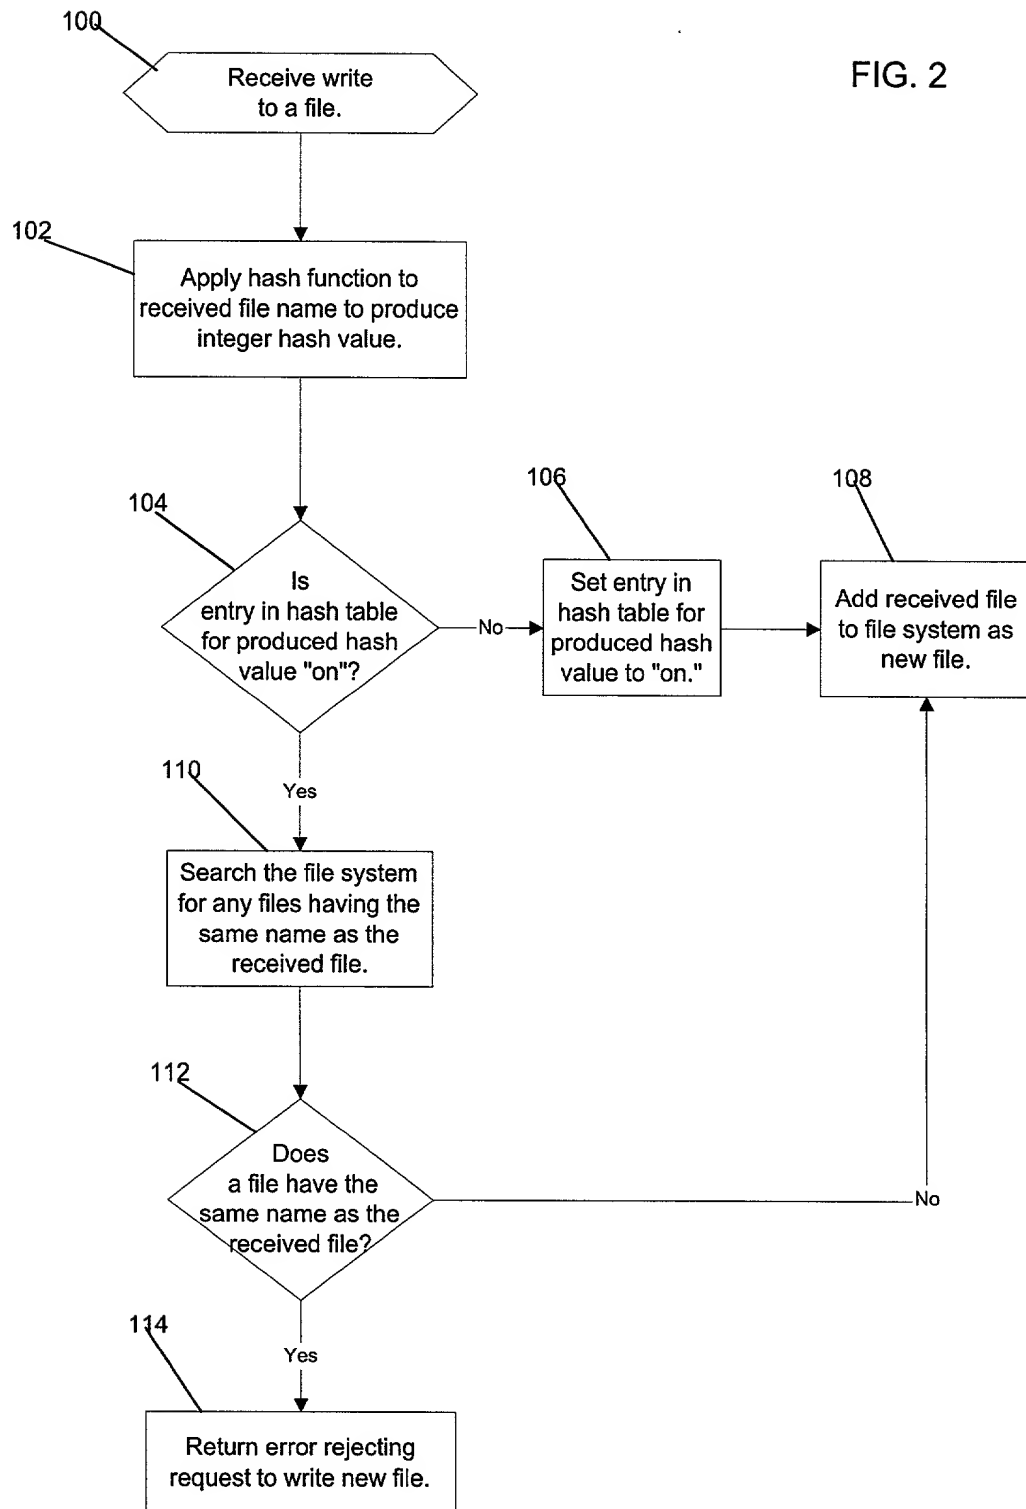

09405310099
66T00T ET 950450

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

METHOD, SYSTEM, AND PROGRAM FOR ACCESSING FILES IN A FILE SYSTEM

the specification of which (check one)

☒ is attached hereto.

☐ was filed on _____

as Application Serial No. _____

and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Priority Claimed

None		Yes	No
(Number)	(Country)	(Day/Month/Year Filed)	
_____	_____	_____	_____

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56, which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

None			
(Application Serial No.)	(Filing Date)	(Status)	(patented, pending, abandoned)
_____	_____	_____	_____

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: David W. Victor, Reg. No. 39,867; William K. Konrad, Reg. No. 28,868; Gary D. Mann, Reg. No. 34,867; Alan S. Raynes, Reg. No. 39,809; Matthew J. Bussan, Reg. No. 33,614; Owen J. Gamon, Reg. No. 36,143; Pryor A. Garnett, Reg. No. 32,136; Steven W. Roth, Reg. No. 34,712; John E. Hoel, Reg. No. 26,279; Christopher A. Hughes, Reg. No. 26,914; Edward A. Pennington, Reg. No. 32,588; Joseph C. Redmond, Jr., Reg. No. 18,753.

Send correspondence to:

David Victor, Esq
Konrad Raynes & Victor, LLP
1180 South Beverly Dr., Ste. 501
Los Angeles, CA 90035

Direct all telephone calls to David Victor at (310) 553-7977

FULL NAME OF INVENTOR ONE: Armin Harold Christofferson

INVENTORS SIGNATURE: *Armin Harold Christofferson* DATE: 9/23/99

RESIDENCE: 4203 Manor Woods Drive N.W., Rochester, Minnesota 55901

CITIZENSHIP: United States

POST OFFICE ADDRESS: same as residence

FULL NAME OF INVENTOR TWO: Leon Edward Gregg

INVENTORS SIGNATURE: *Leon Edward Gregg* DATE: 9/23/99

RESIDENCE: 2411 24th Street N.W., Rochester, Minnesota 55901

CITIZENSHIP: United States

POST OFFICE ADDRESS: same as residence

FULL NAME OF INVENTOR THREE: James Lawrence Tilbury

INVENTORS SIGNATURE: *James Lawrence Tilbury* DATE: 9/29/99

RESIDENCE: 2034 Lenwood Drive S.W., Rochester, Minnesota 55902

CITIZENSHIP: United States

POST OFFICE ADDRESS: same as residence

FULL NAME OF INVENTOR FOUR: James Michael Van Oosbree	
INVENTOR'S SIGNATURE: <i>James Michael Van Oosbree</i>	DATE: 9/23/99
RESIDENCE: 2007 38 th Street N.W., Rochester, Minnesota 55901	
CITIZENSHIP: United States	
POST OFFICE ADDRESS: <u>same as residence</u>	

0021.0002